


TS 5000 L
TS 5000 L SoftClose





030172-14

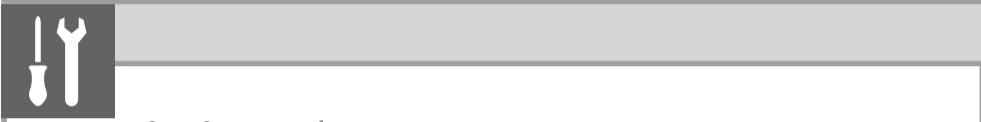













5 mm

A


B

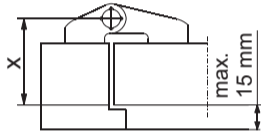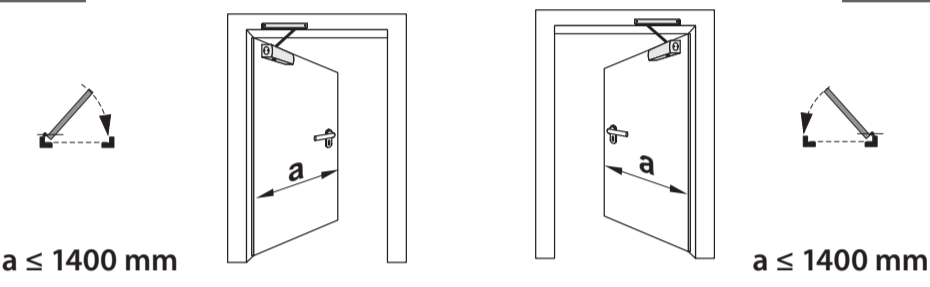


X	G
≤ 90	140
> 90	150
≤ 100	150

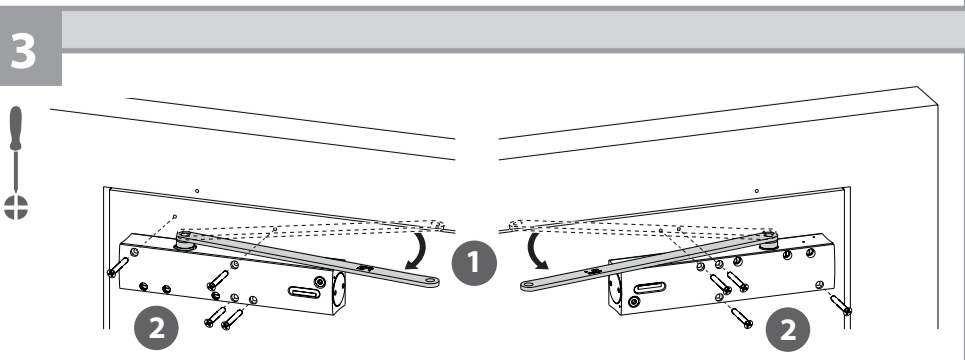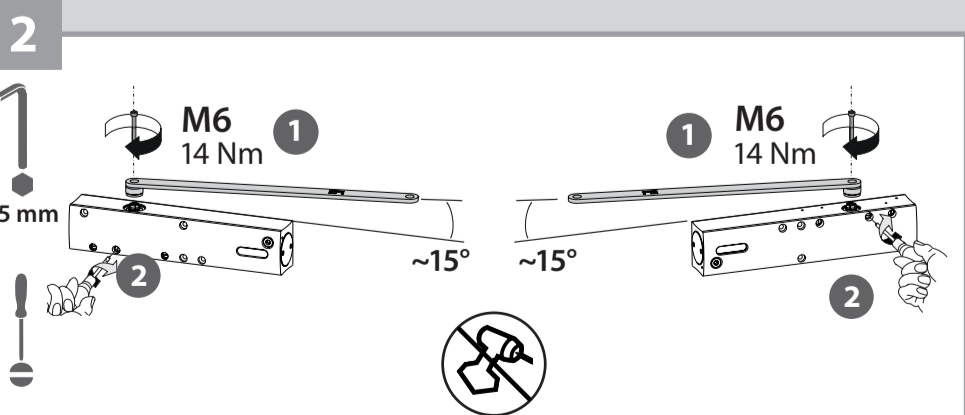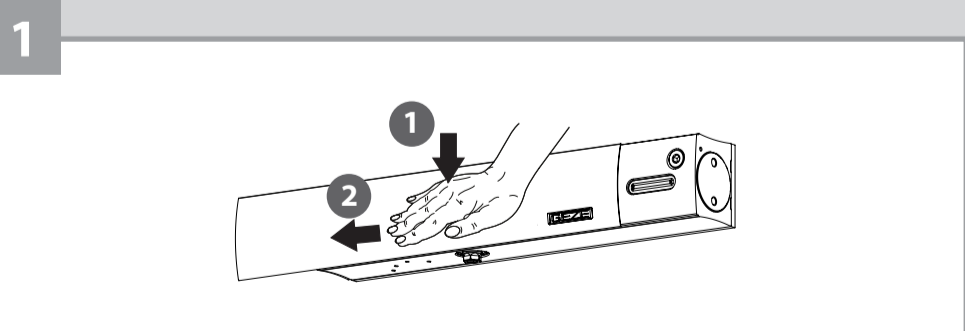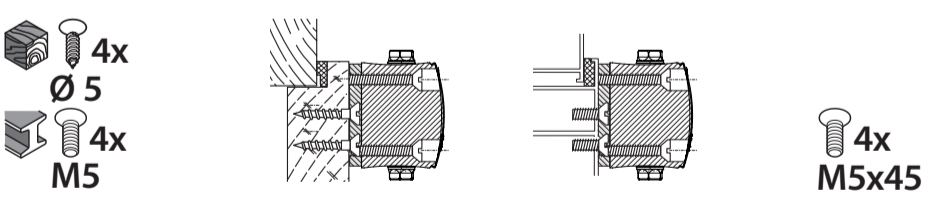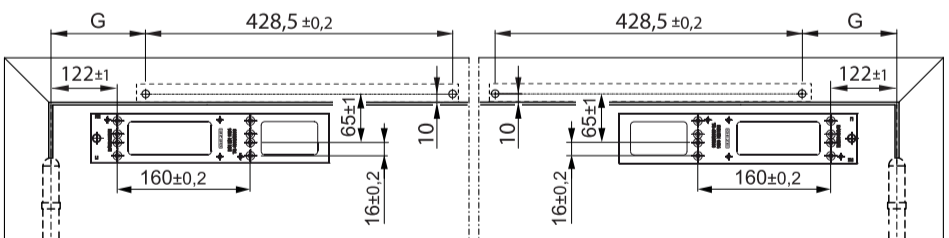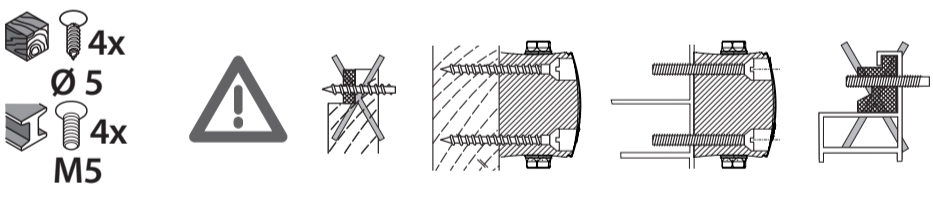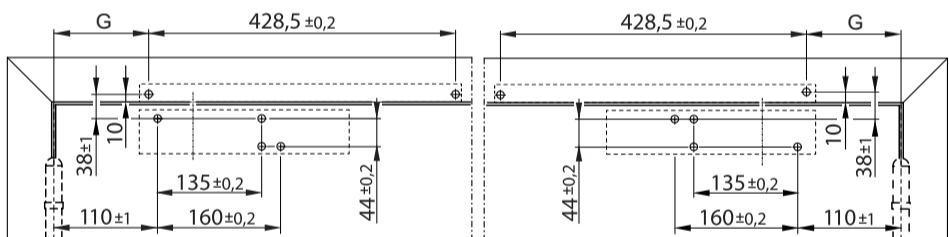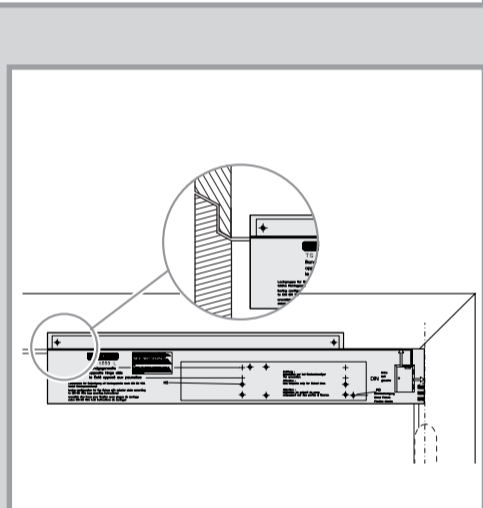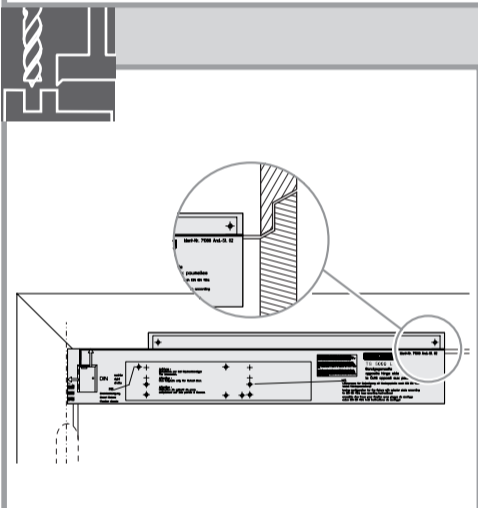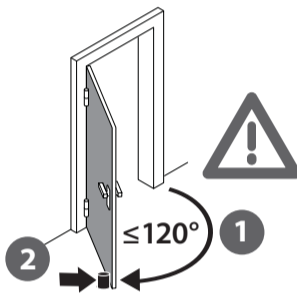


4

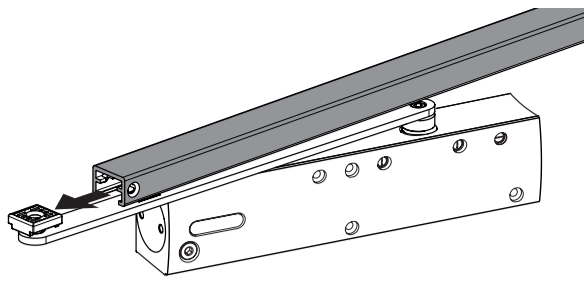

5

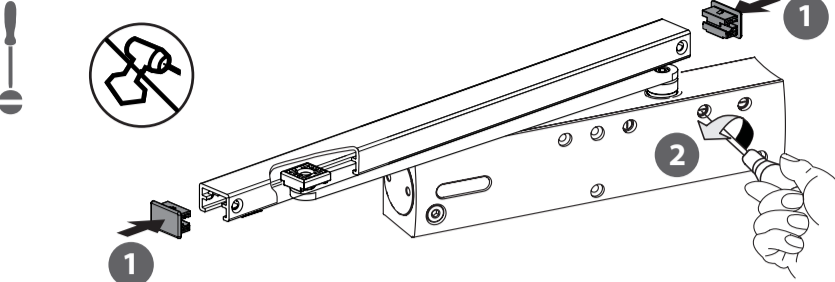

6

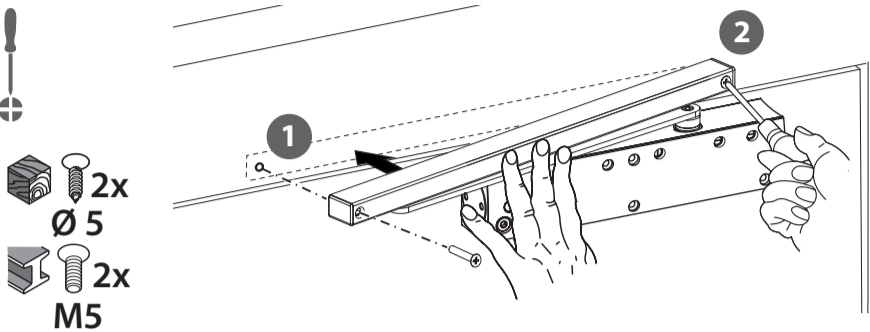

7

5 mm

EN 1154

a (mm) - EN	Setting
1400	6
1250	5
1100	4
950	3
850	2


8

TS 5000 L

90° 7s

i+ TS 5000 L SoftClose

9

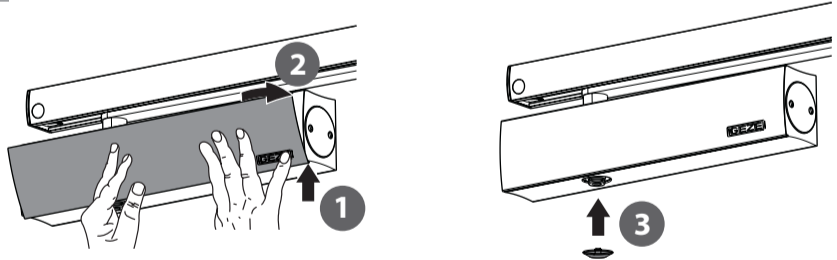

i

