


Product data sheet

NT 2.5 A-24 V SM DIR

power supply *

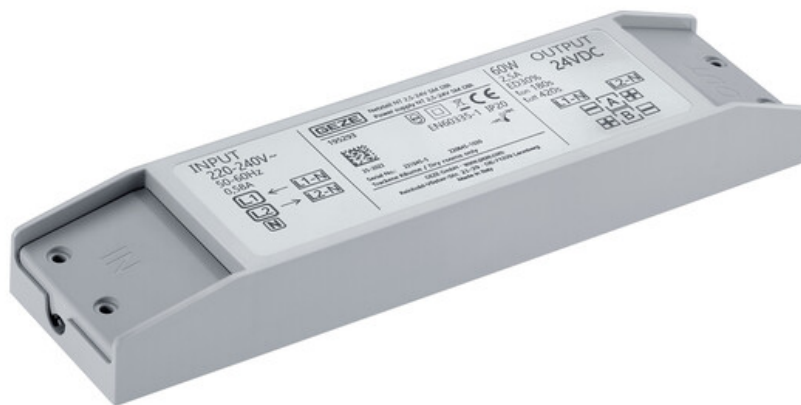

24 V power supply for surface-mounted installation with integrated direction control/polarity reversal

AREAS OF APPLICATION

- For supplying and activating 24 V window drives
- Surface-mounted installation

NT 2.5 A-24 V SM DIR power supply *



PRODUCT FEATURES

- Powerful power supply with small dimensions
- Fast and simple installation

TECHNICAL DATA

Productname	NT 2.5 A-24 V SM DIR power supply *
Dimensions	200 x 50 x 25 mm
Output voltage	24 V DC +/-5%
Output current (max.)	2.5 A
Operating voltage	230 V AC
Material	Plastic
IP rating	IP20

VARIANTS / ORDER INFO

Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
NT 2.5 A-24 V SM DIR power supply *	Output voltage 24 V DC, W x H x D: 200 x 50 x 25 mm, surface-mounted, with integrated direction control/polarity reversal	195293	grey	200 x 50 x 25 mm	230 V AC

ACCESSORIES

LTA-LSA *

Vent switch with rotary knob for OPEN / CLOSE



Designation	Description	Ident-No.	Colour	Dimensions	Type of installation
LTA-LSA vent switch *	with rotary knob, can be used as "open-close" vent switch or stay-put as vent switch "open-stop-close"	118476	alpine white	80 x 80 mm	Flush-mounted installation

NT 2.5 A-24 V SM DIR power supply *



* The products designated above may vary in form, type, characteristics, function, or availability depending on the country. Please get in touch with your GEZE contact person if you have any questions.