


Product data sheet

NT 2.5 A-24 V SM DIR

power supply

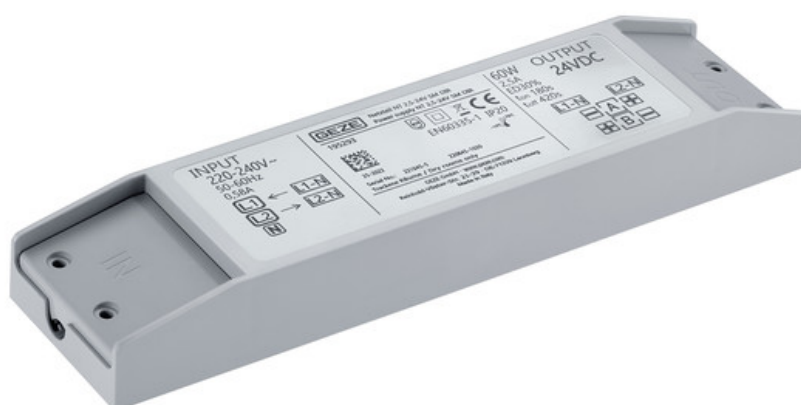

24 V power supply for surface-mounted installation with integrated direction control/polarity reversal

AREAS OF APPLICATION

- For supplying and activating 24 V window drives
- Surface-mounted installation

NT 2.5 A-24 V SM DIR power supply



PRODUCT FEATURES

- Powerful power supply with small dimensions
- Fast and simple installation

TECHNICAL DATA

Productname	NT 2.5 A-24 V SM DIR power supply
Dimensions	200 x 50 x 25 mm
Output voltage	24 V DC +/-5%
Output current (max.)	2.5 A
Operating voltage	230 V AC
Material	Plastic
IP rating	IP20

VARIANTS / ORDER INFO

Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
NT 2.5 A-24 V SM DIR power supply	Output voltage 24 V DC W x H x D: 200 x 50 x 25 mm Surface-mounted installation With integrated direction control/polarity reversal	195293	grey	200 x 50 x 25 mm	230 V AC