

THE PARTITION SYSTEMS

CONTENTS

GD 45S	4
GD 45 SEG	5
GD 45 GRID	6
GD 75 T	7
GD 75 T C	8
GD 105 W	9
GD 105 WG	10
CURVED GD 105 W	11
GD 105 W+	12
DOOR SYSTEM- STILE DOORS	13
DOOR SYSTEM- FRAMELESS GLASS DOORS	14
DOOR SYSTEM- SOLID DOORS	15
GEZE DELA STILE DOOR SYSTEM	16
GEZE DELA STILE DOOR SYSTEM WITH DOOR FRAME	17
OTHER DOOR ACCESSORIES & GALLERY	18



GEZE DELA PARTITION SYSTEMS

GEZE DELA PARTITION SYSTEMS

Vertical surfaces divide the office floor in closed and open areas, provide acoustic and visual barriers, promote transparency and privacy simultaneously. Specializing in modern office partition designs, we can provide you a range of partition system and help you create the perfect office layout design.

GEZE DELA is the leading commercial partitioning system provider. With qualified and experienced team of professionals we offer out innovative, spacious partitioning systems designed to meet the particular needs of offices, banks, healthcare and retail environments.


Our systems are designed and such as to provide infinite posibilities of design combination to match the concepts and design of the architects and also the customers requisites.

All our products are finished using a sandblasted proces, powder coated for an entire array of RAL shades and our latest range includes stunning stainless steel, bronze, rose-gold and endless possibilities of finishes.


GD-45S

GEZE DELA system GD-45S i.e.. Single glazed modular system consists of Aluminium section of 30x45x2 mm thick, with adaptable profile for 6 mm Groove system to accommodate the carpet & the uneven surfaces. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium I/H sections, T section & 90 degree L sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 30 mm visible face and 45 mm wide with 10/12mm toughened glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 32 to 35 Db.




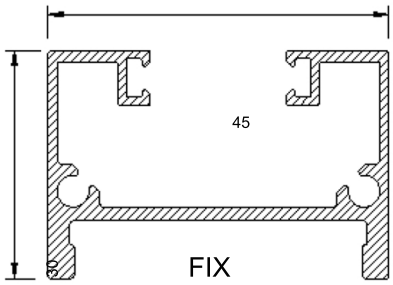

FIX

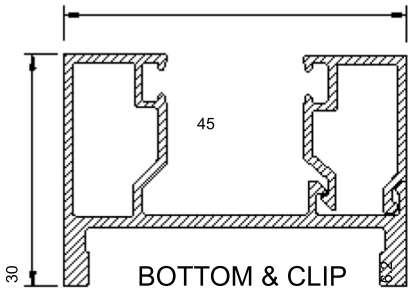

BOTTOM & CLIP


GROOVE PROFILE


T6 Grade Virgin Aluminium
Section dimensions:
Width: 45mm
Height: 30mm
Thickness: 2mm
Gasket: Silicon based
Glass connection system: Aluminium / Clear G2G seal
Bonding: Glass mounting clear adhesive tape




GEZE DELA PARTITION SYSTEMS

GD-45SEG

GEZE DELA system GD-45SEG i.e. Single glazed modular system consists of Aluminium section of 30x45x2 mm thick segmented partition with adaptable profile for 6 mm Groove system to accommodate the carpet & the uneven surfaces. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium Vertical section of 45 x 30 mm sections, Horizontal section of 45 x 30 mm sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 30 mm visible face and 45 mm wide with 10mm toughened glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 32 to 35 Db.



GROOVE PROFILE

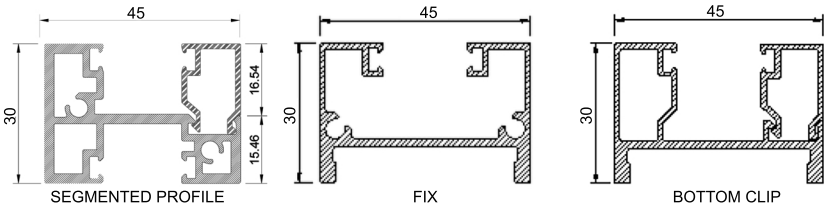

SEGMENTED PROFILE FIX BOTTOM CLIP

T6 Grade Virgin Aluminium
Section dimensions:
Width: 45mm
Height: 30mm
Thickness: 2mm
Gasket: Silicon based
Glass connection system: Aluminium / Clear G2G seal
Bonding: Glass mounting clear adhesive tape



GEZE DELA PARTITION SYSTEMS


GD-45 Grid

GEZE DELA Grid System GD-45Grid i.e.. Single glazed modular system consists of Aluminium section of 30x45x2 mm thick Stick-on partition with adaptable profile for 6 mm Groove system to accommodate the carpet & the uneven surfaces. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium Vertical Stick-on section of 30 x 6 mm sections, Horizontal Stick-on section of 30 x 6 mm sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 30 mm visible face and 45 mm wide with 10mm toughened glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 32 to 35 Db.




GRID STICK-ON PROFILE


T6 Grade Virgin Aluminium
Section dimensions:
Width: 45mm
Height: 30mm
Thickness: 2mm
Gasket: Silicon based
Glass connection system: Aluminium / Clear G2G seal
Bonding: Glass mounting clear adhesive tape



FIX



GROOVE PROFILE



BOTTOM & CLIP




GD-75T


GEZE DELA System GD-75T i.e.. Single glazed modular system consists of Aluminium section of 30x75x1.5mm thick with adaptable profile for 6 mm Groove system to accommodate the carpet & the uneven surfaces. All sections duly anodized up to 20 - 25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium I/H sections, T section & 90 degree L sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 30 mm visible face and 75 mm wide with 10/12 mm toughened glass & insertion of Thermo plastic gasket to adhere the glass firm & airtight. Sound Reduction from 32 to 36 db.




GROOVE PROFILE



BOTTOM CLIP

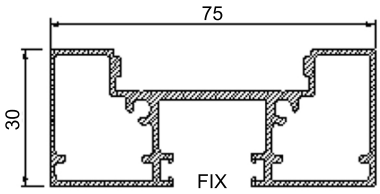

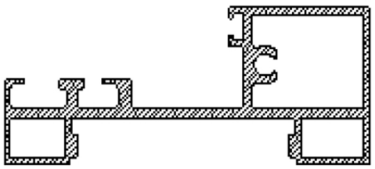

BOTTOM

T6 Grade Virgin Aluminium
Section dimensions:
Width: 75mm
Height: 30mm
Thickness: 1.5mm
Gasket: Silicon based
Glass connection system: Aluminium / Clear G2G seal
Bonding: Glass mounting clear adhesive tape

Variant:
GEZE DELA GD-75T C




GEZE DELA PARTITION SYSTEMS

GD-75T C


GEZE DELA Curved Partition System GD-75T i.e.. Single glazed modular system consists of Aluminium section of 30x75x1.5mm thick with adaptable profile for 6 mm Groove system to accommodate the carpet & the uneven surfaces. All sections duly anodized up to 20 - 25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium I/H sections, T section & 90 degree L sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 30 mm visible face and 75 mm wide with 10/12 mm toughened glass & insertion of Thermo plastic gasket to adhere the glass firm & airtight. Sound Reduction from 32 to 36 db.




GROOVE PROFILE



FIX



BOTTOM CLIP

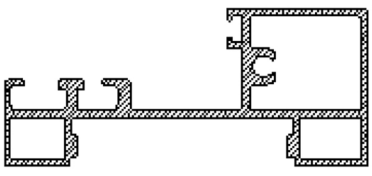

BOTTOM






GEZE DELA PARTITION SYSTEMS


GD-105W

GEZE Dela System GD-105W i.e. Single glazed modular system consists of Aluminium section of 30 x 105 x 1.5mm thick. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium I/H sections, T section & 90 degree L sections & glass packing to adjust the floor level. Ceiling profile, floor profile and wall profile are 30mm visible face and 105 mm wide with 10/12mm toughened glass & insertion of thermoplastic gasket to adhere the glass firm & airtight. Sound reduction from 32 to 35 db.

Profile Dimensions:
Width: 105 mm
Height: 30 mm
Thickness: 1.5 mm
Gasket: Thermoplastic slide in Gasket for better acoustic performance
Glass Connection System & Bonding: Aluminium/ Clear G2G Seal, Glass mounting clear adhesive tape (Pentagon, USA make)
Aluminium: 6063-T6 Grade Aluminium
Dimensions:
Glass Thickness: 10, 12 mm, Maximum Partition Height: 3,000 mm, Clear Door passage for Single leaf: 700 to 1400 mm, Clear Door Passage for Double leaf: 1400 to 2800 mm
Sound Reduction Value: 32-35 db (depending on the type of glass)
Doors & Frames: Doors & Frames Chart available

FIXED






GROOVE



BOTTOM CLIP




BOTTOM



GEZE DELA PARTITION SYSTEMS

GD-105WG


GEZE DELA System GD-105WG i.e.. Single glazed modular system consists of Aluminium section of 25x105x1.5mm thick., With 6 mm Groove inbuilt in system to accommodate the carpet & the uneven surfaces. All sections duly anodized up to 15-20 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium I/H sections, T section & 90 degree L sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 105 mm wide with 10/12 mm toughened glass & insertion of Thermo plastic gasket to adhere the glass firm & airtight. Sound Reduction from 32 to 35 db.

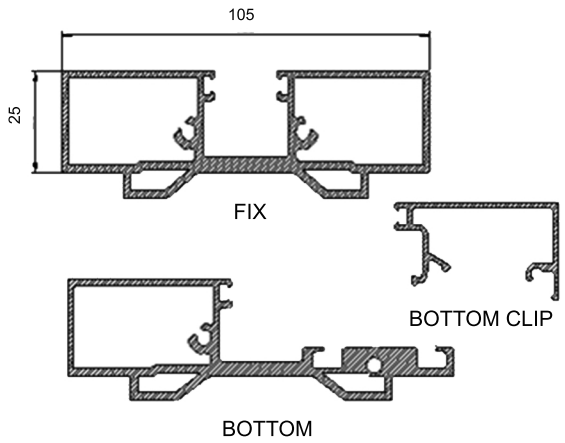



Curved GD-105W

GEZE Dela Curved Partition System GD-105W i.e. Single glazed modular system consists of Aluminium section of 30 x 105 x 1.5mm thick. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium I/H sections, T section & 90 degree L sections & Glass packing to adjust the floor level. Ceiling profile, floor profile and wall profile are 25mm visible face and 105mm wide with 10/12 mm toughned glass & insertion of Thermo plastic gasket to adhere the glass firm & airtight. Sound reduction from 32 to 35 db.




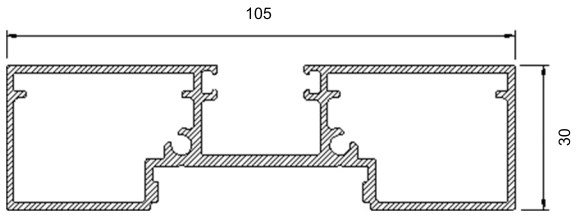



BOTTOM CLIP



GROOVE PROFILE
80

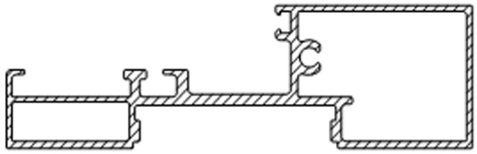

BOTTOM

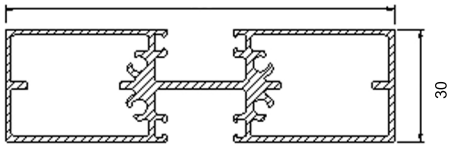




GD-105W+

GEZE DELA System GD-105W+ i.e.. Double glazed modular system consists of Aluminium section of 30x105x1.5mm thick ,With adaptable profile for 6 mm Groove system to accommodate the carpet & the uneven surfaces. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium I/H sections, T section & 90 degree L sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 105 mm wide with 10/12 mm toughened glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 42 to 45 Db.

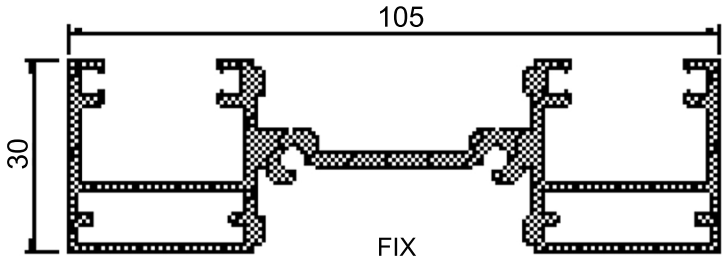

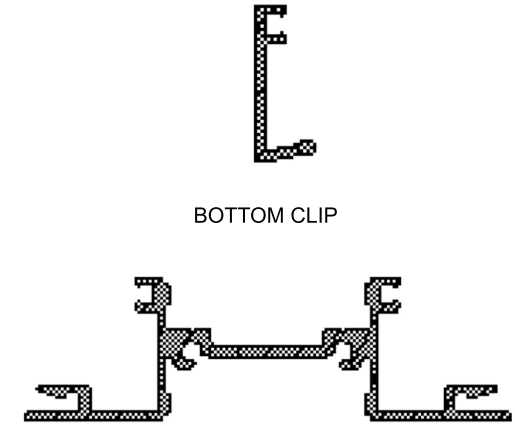



T6 Grade Virgin Aluminium
Section dimensions:
Width: 105mm
Height: 30mm
Thickness: 1.5mm
Gasket: Silicon based
Glass connection system: Aluminium / Clear G2G seal
Bonding: Glass mounting clear adhesive tape

DOOR SYSTEM- STILE DOORS



Recommended door hardware:

OPTION 1:

1. Flush hinges
2. Narrow stile lever handle
3. Narrow stile sash lock with EPC
4. TS 3000 V- Exposed door closer
5. Concealed drop down seal.

OPTION 2:

1. Flush hinges
2. Narrow stile lever handle
3. Narrow stile sash lock with EPC
4. Boxer- Concealed door closer
5. Concealed drop down seal.

OPTION 3:

1. Flush hinges
2. Offset pull handle
3. Narrow stile dead lock with EPC
4. TS 3000 V- Exposed door closer
5. Concealed drop down seal.

OPTION 4:

1. Flush hinges
2. Offset pull handle
3. Narrow stile dead lock with EPC
4. Boxer- Concealed door closer
5. Concealed drop down seal.

GEZE Door Hardware



Note: Applicable for Door frames GD-75 T and GD-105 W

DOOR SYSTEM- FRAMELESS GLASS DOORS

Recommended door hardware:

OPTION 1:

1. GEZE Glasklar hinges
2. Lever handle with lockset
3. TS 3000 V- Exposed door closer with saddle plate.

OPTION 2:

1. GEZE Glasklar hinges
2. Pull handle with bottom lock
3. TS 3000 V- Exposed door closer with saddle plate.

OPTION 3:

1. GEZE Patch fitting (top pivot plate, top patch, bottom patch, bottom lock)
2. H-type/D-type pull handle
3. Floorspring.



GEZE DELA PARTITION SYSTEMS

GEZE Door Hardware





Note: Applicable for Door frames GD-45 S, and GD-75 T

DOOR SYSTEM- SOLID DOORS



Recommended door hardware:

OPTION 1:

1. Flush hinges
2. Lever handle
3. Sash Lock with EPC
3. TS 3000 V- Exposed door closer
4. Concealed drop down seal.

OPTION 2:

1. Flush hinges
2. Lever handle
3. Sash Lock with EPC
3. Boxer- Concealed door closer (max. door thickness is 40mm)
4. Concealed drop down seal.

OPTION 3:

1. Flush hinges
2. H type/ D type pull handle with dead lock
3. TS 3000 V door closer,
4. Concealed drop down seal.

OPTION 4:

1. Flush hinges,
2. H type/ D type pull handle with deadlock
3. Boxer- Concealed door closer (max. door thickness is 40mm)
4. Concealed drop down seal.

GEZE Door Hardware



Note: Applicable for Door frames GD- 45 S, GD-75 T and GD-105 W

GEZE DELA PARTITION SYSTEMS

GEZE DELA STILE DOOR SYSTEM

TECHNICAL SPECIFICATIONS:

Profile Dimensions:

Vertical
- Width: 40mm
- Visible surface: 75mm
- Thickness: 2mm

Horizontal
- WIdth: 37mm
- Visible Surface: 75mm
- Thickness: 2mm

Gasket:


- Silicon based thermoplastic gasket

Aluminium:

- 6063-T6 Grade virgin aluminium

Dimensions:

- Glass thickness: 10, 12mm
- Clear door passage for single leaf:
- 600 to 1500 mm
- Clear door passage for double leaf:
- 1400 to 3000mm

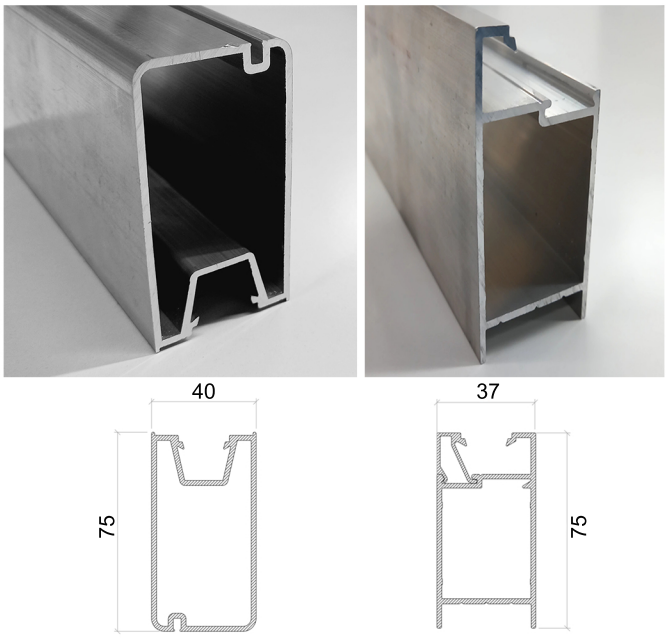

Vertical **Horizontal with clip**


GEZE Dela Stile door system, having size of 75 x 40 vertical section and 75 x 37mm horizontal section with clip i.e. 6063- T6 grade aluminium sections, 10 & 12mm toughened glass suitable for the system with GEZE make door hardware as per approved by Architect / Consultant / Client.





GEZE DELA STILE DOOR SYSTEM WITH DOOR FRAME

GEZE DELA Stile door system, having size of 75 x 45 vertical section and 75 x 42 mm horizontal with clip i.e. 6063-T6 grade duly anodized aluminium sections upto 18- 20 microns. 10mm toughened glass suitable for the system with GEZE make door hardware as per approved by Architect / Consultant / Client.

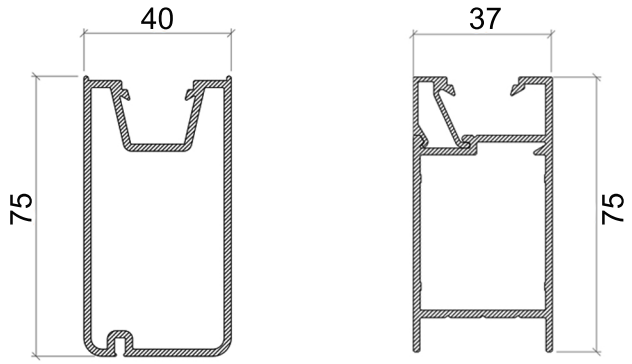

Vertical **Horizontal with clip**

Technical Specifications:

Profile dimensions:

- Vertical
- Width: 40mm
- Visible surface: 75mm
- Thickness: 2mm

- Horizontal
- Width: 37mm
- Visible surface: 75mm
- Thickness: 2mm

Gasket:


- Silicon based thermoplastic gasket

Aluminium:

- 6063-T6 Grade virgin aluminium

Dimensions:

- Glass thickness: 10, 12mm
- Clear door passage for single leaf:
- 600 to 1500mm
- Clear door passage for double leaf:
- 1400 to 3000mm

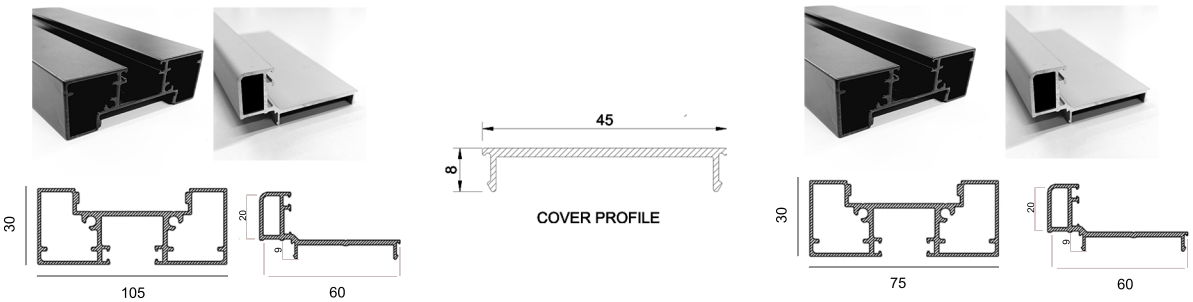

GD 105 Door Frame:

Profile Dimension
Size :

- W 105mm x 30mm

Gasket:

- silicon based thermoplastic gasket

Aluminium :

- 6063-T6 grade virgin aluminium

Glass:

- Glass thickness 10mm, 12mm

GD 75 Door Frame:

Profile Dimension
Size :

- W 75mm x 30mm

Gasket:

- silicon based thermoplastic gasket

Aluminium :

- 6063-T6 grade virgin aluminium


Glass:

- Glass thickness 10mm, 12mm


OTHER DOOR ACCESSORIES :


GD – 105W

GEZE Dela wideline 105W Single Glazed Dual Portal consists of Aluminium section of Size 105mm x 105mm x 2.5mm thick with provision of one side door frame and other side glass

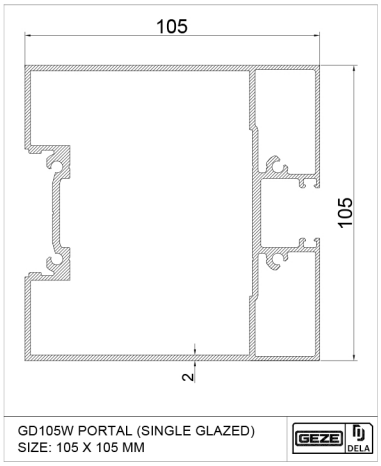


H 'Profiles :

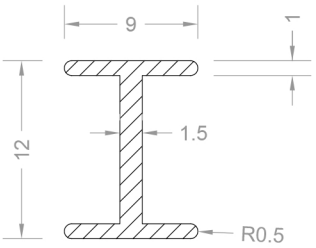


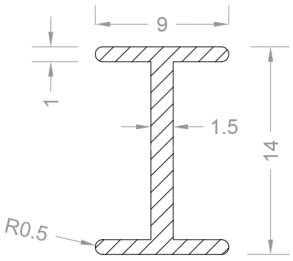

L Corner Profiles :





T Profiles :

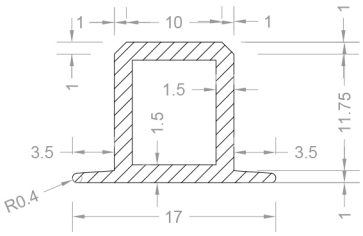


Gallery :



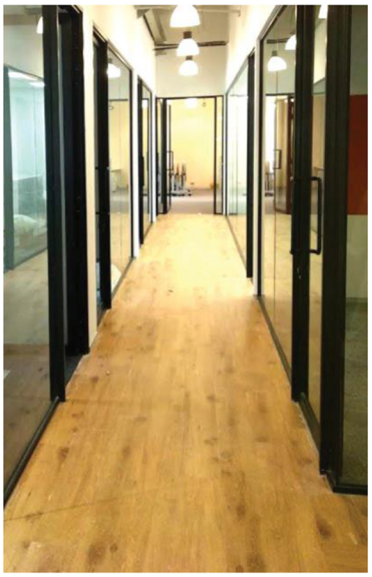

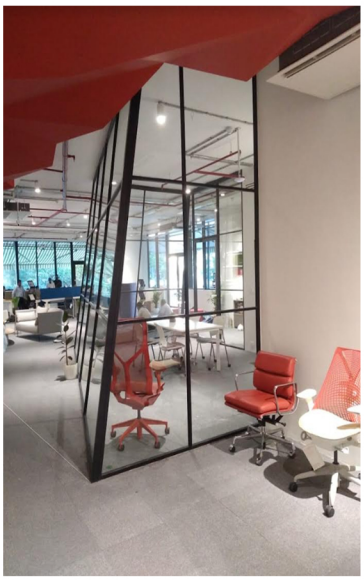

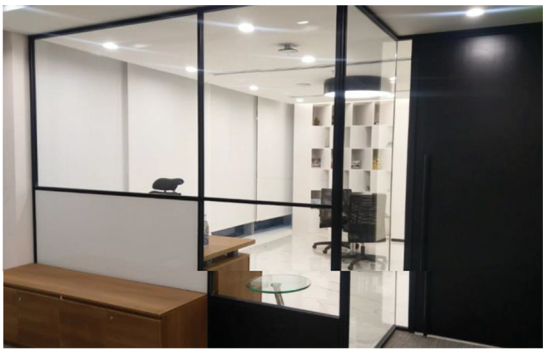




GALLERY







GEZE DELA PARTITION SYSTEMS

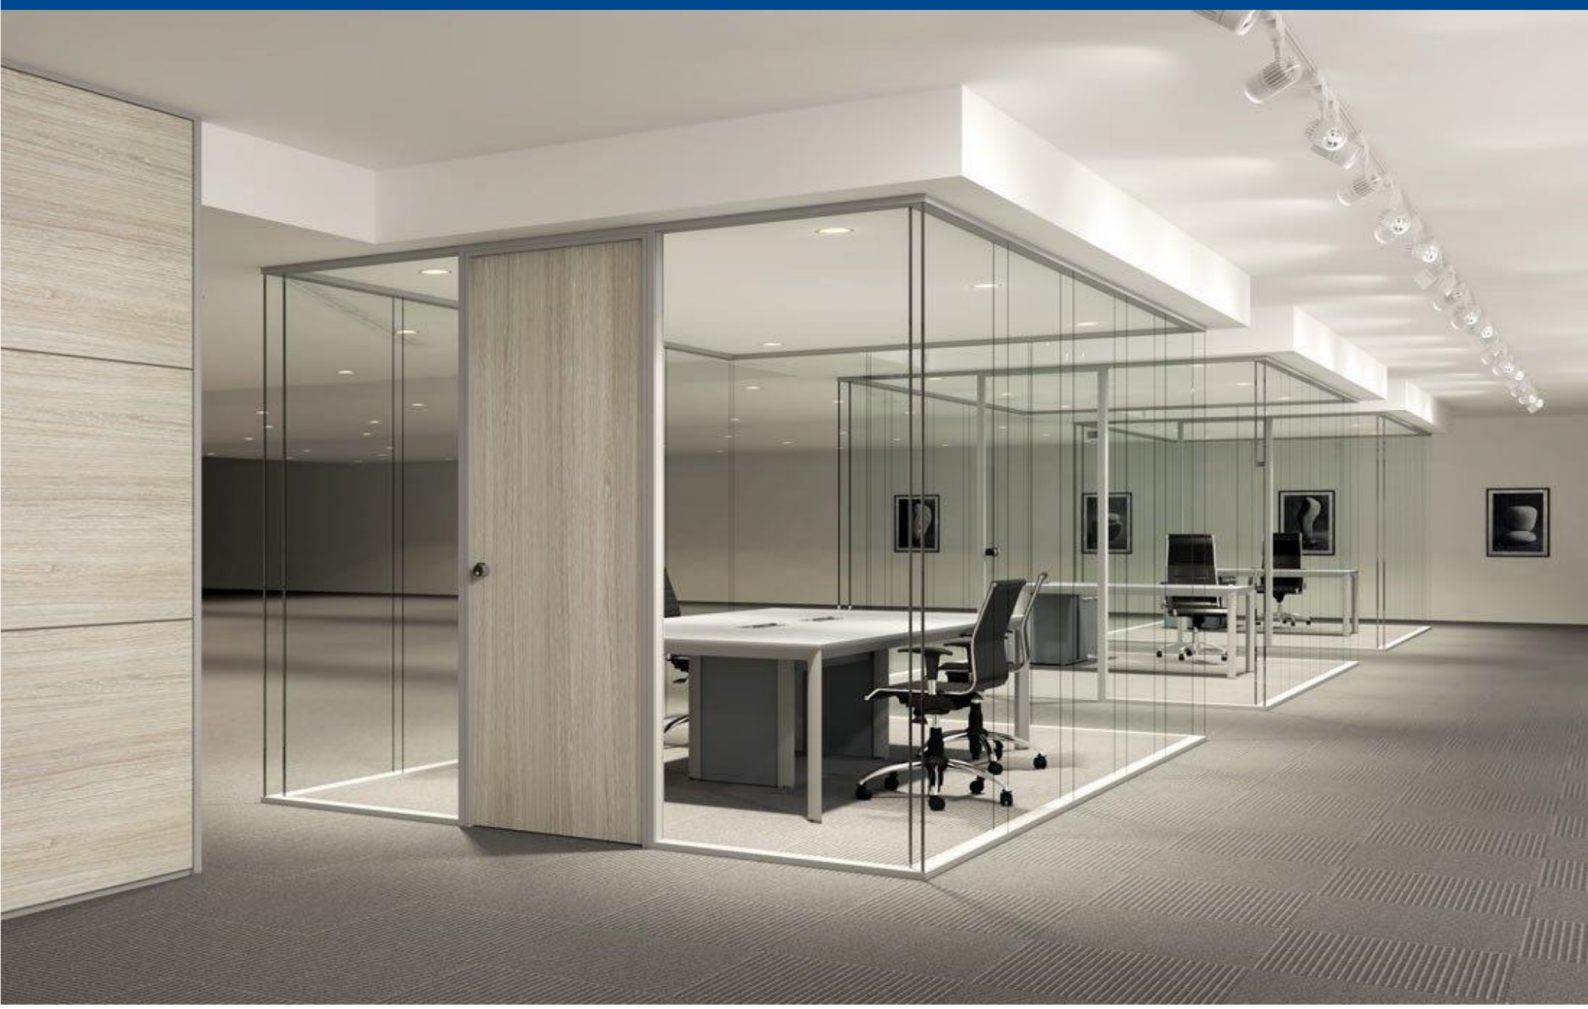

GEZE India Pvt. Ltd. | MF 2 & 3, Guindy Industrial Estate | Ekkatuthangal Chennai- 600 032 |
TEL +91 44 4061 6900 | **FAX** +91 44 4061 6901 | **WEB** www.geze.in |
E-MAIL office-india@geze.com |