
Product data sheet

Relay unit

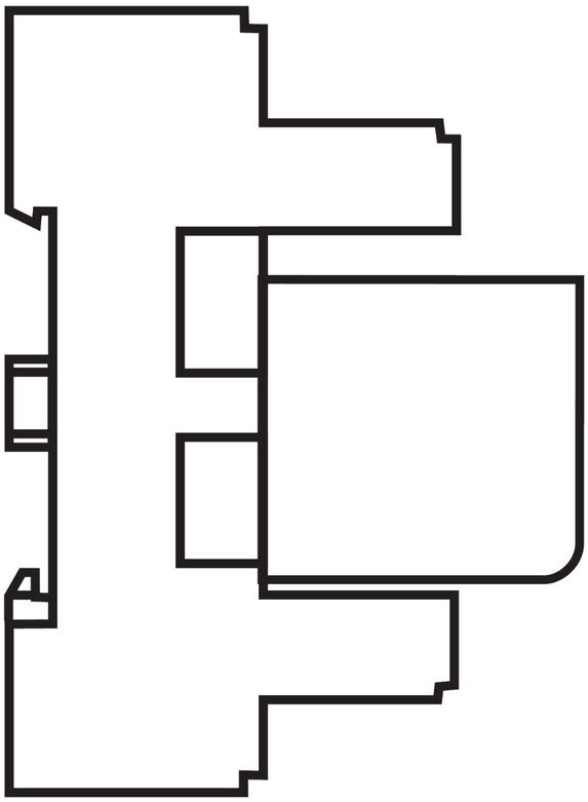

with top hat rail for direct fastening in the drive, 4 change-over contacts, current consumption approx. 25 mA at 24 V DC

TECHNICAL DATA

Productname	Relay unit

Relay unit

VARIANTS / ORDER INFO

Designation	Description	Ident-No.	Dimensions	EAN
Relay unit 24 V DC	with top hat rail for direct fastening in the drive, 4 change-over contacts, current consumption approx. 25 mA at 24 V DC / for connection to the programmable outputs of DCU control units and door control units to switch larger electrical loads	024542	59.5 x 70 x 67.5 mm	4106030245421