


Product data sheet

MBZ 300 *

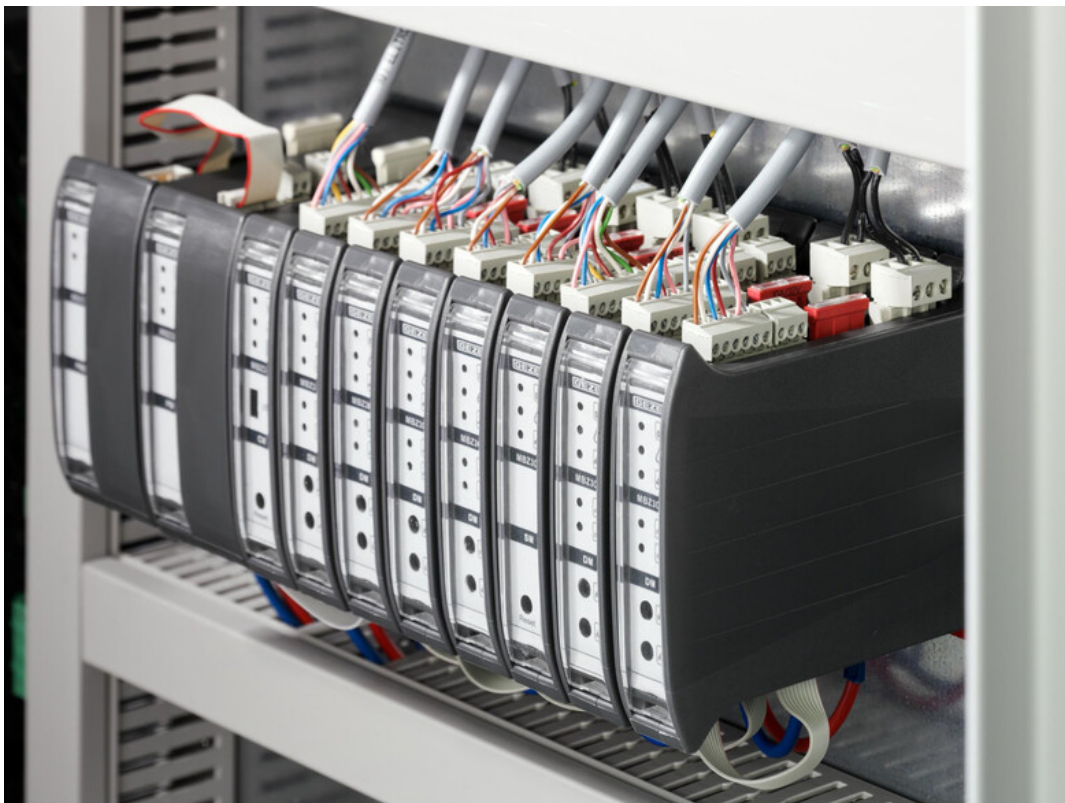

SHEV control panel for smoke and heat extraction drives with a total current consumption of 8 A to 72 A

AREAS OF APPLICATION

- Small to large and networked smoke and heat extraction systems
- Control of electromotive 24 V drives for smoke and heat extraction in the event of a fire
- Control of a controlled natural ventilation

PRODUCT FEATURES

- Modular design to allow flexible adaptation to project-specific requirements
- Convenient extension by clicking on other modules in a control unit
- Can be extended by alarm groups, ventilation groups and alarm lines as required
- Depiction of complex smoke and heat extraction scenarios
- Simple service and installation thanks to status display directly on the module
- Configuration software simplifies commissioning and configuration
- Wind direction dependent activation possible (SHEV according to EN 12101-2)
- Safety and reliability confirmed by VdS certification

TECHNICAL DATA

Productname	MBZ 300 *
Material	Sheeting
Colour	grey RAL 7035
IP rating	IP30
Service temperature	-5 - 40 °C
Operating voltage	230 V AC
Power consumption (max.)	1440 W
Connection cross-section / mains	2.5 mm ²
Output voltage	24 V DC +/- 15%
Residual ripple	2 %
Output current (max.)	72 A
Duty rating with maximum output current	30 %
Motor cable wire size	10 mm ²
Battery capacity	38 Ah
Networking of several control units	connection with optional CAN Bus modules
Signal outputs available	1 status contact per CM/SM, 6 signal contacts per ERM for which parameters can be set
Parameter setting of control units	via USB interface an PC software
Standard conformity	EN 12101-10, ISO 21927-9
Approvals	VdS

NETWORKING

MBZ 300 ***PART****MBZ 300 N10 ***

SHEV control panel for smoke and heat extraction system drives with a total current consumption of 10 A



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
MBZ 300 N10 *	10 A output current. Including rechargeable battery Exterior dimensions: 400 x 500 x 200 mm	137428	grey	400 x 500 x 200 mm	230 V AC

MBZ 300 N24 *

SHEV control panel for smoke and heat extraction system drives with a total power consumption of 24 A



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
MBZ 300 N24 *	Output current 24 A. Including rechargeable battery. Exterior dimensions: 600 x 600 x 250 mm	137430	grey	600 x 600 x 250 mm	230 V AC

MBZ 300 N48K *

SHEV control panel for smoke and heat extraction system drives with a total power consumption of 48 A



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
MBZ 300 N48K *	Output current 48 A. Incl. rechargeable battery. Exterior dimensions: 600 x 600 x 250 mm	137461	grey	600 x 600 x 250 mm	230 V AC

MBZ 300 ***MBZ 300 N48G ***

SHEV control panel for smoke and heat extraction system drives with a total power consumption of 48 A



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
MBZ 300 N48G *	Output power 48 A. Including rechargeable battery. Exterior dimensions: 600 x 800 x 250 mm	137462	grey	600 x 800 x 250 mm	230 V AC

MBZ 300 N72 *

SHEV control panel for smoke and heat extraction system drives with a total power consumption of 72 A



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
MBZ 300 N72 *	Output current 72 A. Including rechargeable battery. Exterior dimensions: 600 x 800 x 250 mm	137463	grey	600 x 800 x 250 mm	230 V AC

MBZ 300 N8 *

SHEV control panel for smoke and heat extraction drives with a total power consumption of 8 A



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
MBZ 300 N8 with rail-mount terminal blocks	Output current 8A. Including rechargeable battery and pre-wired 4 mm ² terminal blocks. Exterior dimensions: 300 x 400 x 200 mm	187322	grey RAL 7035	300 x 400 x 200 mm	230 V AC
MBZ 300 N8 *	Output current 8A. Including rechargeable battery Exterior dimensions: 300 x 400 x 200 mm	188034	grey RAL 7035	300 x 400 x 200 mm	230 V AC

ACCESSORIES

LTA-24-AZ

Vent switch with control keys OPEN / CLOSE and LED function display



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
LTA-24-AZ vent switch	with control keys "open-close" and LED function display	129393	alpine white	80 x 80 mm	24 V DC

RAIN AND WIND CONTROL *

Weather station and control unit for rain and wind monitoring



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
Rain and wind control *	Consisting of a weather station and control unit. Output: potential-free contacts for rain/wind / For use with THZ, THZ Comfort, E 260 and MBZ 300	091529	white	96 x 77 x 118 mm	24 V DC

RM 1003 *

Smoke detector for GEZE control panels



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
RM 1003 smoke detector *	Ceiling-mounted detector for GEZE SHEV control panels. VdS approved and EN 54 tested, incl. base.	112877	white RAL 9016	42 mm	24 V DC

WM 1005 *

Heat detector for GEZE SHEV control panels



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
WM 1005 heat detector *	Ceiling-mounted detector for GEZE SHEV control panels. VdS approved and EN 54 tested, incl. base.	112878	white RAL 9016	40 mm	24 V DC

GC 401 RS + 402 WVS SET *

Rain and wind sensor set for use with the MBZ 300 control panel



Designation	Description	Ident-No.	Colour	Operating voltage
Rain and wind sensor set GC 401 RS + 402 WVS	Use with the MBZ 300 weather module	140229	black	24 V DC

GC 401 RS *

Rain sensor for use with the MBZ 300 control panel



Designation	Description	Ident-No.	Colour	Operating voltage
GC 401 RS rain sensor	Use with the MBZ 300 weather module	140226	black	24 V DC

MBZ 300 *



GC 402 WVS *

Wind speed sensor for use with the MBZ 300 control panel



Designation	Description	Ident-No.	Colour
GC 402 WVS wind speed sensor *	Use with the MBZ 300 weather module	140227	black

GC 403 WDS *

Wind direction sensor for use with the MBZ 300 control panel



Designation	Description	Ident-No.	Dimensions	Operating voltage	Number of cores
GC 403 WDS wind direction sensor	Use with the MBZ 300 weather module	140228	460 mm	24 V DC	6 cores

LTA-LSA *

Vent switch with rotary knob for OPEN / CLOSE



Designation	Description	Ident-No.	Colour	Dimensions	Type of installation
LTA-LSA vent switch *	with rotary knob, can be used as "open-close" vent switch or stay-put as vent switch "open-stop-close"	118476	alpine white	80 x 80 mm	Flush-mounted installation

E 70 *

Room thermostat for ventilation control



Designation	Description	Ident-No.	Colour	Dimensions
E 70 room thermostat *	for dry closed rooms with setting of two switching points	079087	white	75 x 75 x 30 mm

FT 4 A *

SHEV button for the connection to GEZE control panels



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
FT 4 A SHEV button *	in aluminium housing, incl. label "SMOKE VENT"	161285	grey RAL 7035	126 x 126 x 32 mm	24 V DC
FT 4 A SHEV button *	in aluminium housing, incl. label "SMOKE VENT"	161286	yellow RAL 1021	126 x 126 x 32 mm	24 V DC
FT 4 A SHEV button *	in aluminium housing, incl. label "SMOKE VENT"	161283	red similar to RAL 3000	126 x 126 x 32 mm	24 V DC
FT 4 A SHEV button *	in aluminium housing, incl. label "SMOKE VENT"	161284	blue RAL 5015	126 x 126 x 32 mm	24 V DC

FT 4 A - VDS *

SHEV button with VdS approval for the connection to GEZE control panels



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
SHEV button FT 4 A - VdS	in aluminium housing, incl. label "SMOKE VENT"	161282	orange RAL 2011	126 x 126 x 32 mm	24 V DC

GC 240 RS *

Rain sensor for use with the MBZ 300 and THZ/THZ Comfort control panels



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
GC 240 RS rain sensor *	Rain sensor for connection to THZ/MBZ 300 SHEV control panels. Incl. bracket for wall or mast mounting	189313	white RAL 9010	70 x 62 x 37 mm	24 V DC

GC 162 RWA *

Smoke detector for GEZE control panels



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
GC 162 RWA smoke detector *	Ceiling-mounted detector for GEZE SHEV control panels. Operating lifetime up to 8 years thanks to automatic dust and dirt compensation. Tested according to EN 54, incl. base	184110	white RAL 9010	110 x 110 x 54 mm	24 V

GC 163 RWA *

Heat detector for GEZE SHEV control panels



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
GC 163 RWA heat detector *	Ceiling-mounted detector for GEZE SHEV control panels. EN 54 tested, incl. base	184139	white RAL 9010	110 x 110 x 54 mm	24 V DC

FT 4 A ACOUSTIC *

SHEV button with acoustic signal for connection to GEZE SHEV control panels



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
SHEV button FT 4 A Acoustic, *	In diecast aluminium housing with acoustic signal for alarm/faults, including "SMOKE VENT" sign	198926	grey RAL 7035	126 x 126 x 32 mm	24 V DC
SHEV button FT 4 A Acoustic, *	In diecast aluminium housing with acoustic signal for alarm/faults, including "SMOKE VENT" sign	198925	orange RAL 2011	126 x 126 x 32 mm	24 V DC

FT 4 A SECONDARY UNIT *

SHEV button for the connection to GEZE control panels



Designation	Description	Ident-No.	Colour	Dimensions	Operating voltage
SHEV button FT 4 A secondary unit, *	in diecast aluminium housing, as secondary unit only with alarm LED, incl. "SMOKE VENT" sign	198914	orange RAL 2011	126 x 126 x 32 mm	24 V DC

SLE 220 *

Warning light for reinforcing an optical alarm signal



Designation	Description	Ident-No.	Colour	Supply voltage	Operating voltage
SLE 220 indicator lamp surface mounting *	External signal lamp for visual alarm indication, operating voltage: 24 V DC, reflector colour: red, IP rating: IP20, W x H x D: 61 x 61 x 74 mm	020866	red	24 V DC	24 V DC

MULTIFUNCTION SIREN *

Horn for reinforcing an acoustic alarm signal



RAIN AND WIND STATION RWS 60-1 SET *

Weather station and control unit for rain and wind monitoring



Designation	Ident-No.	Material
Rain and wind station RWS 60-1 set *	165813	Plastic with aluminium bracket

* The products designated above may vary in form, type, characteristics, function, or availability depending on the country. Please get in touch with your GEZE contact person if you have any questions.